


# ASK nano




## Key Features

- Up to 40m between laptop and connected display
- Self-powered on most laptops
- Compact and discrete
- Plug-and-Play – no drivers required
- Support for Windows, macOS, iOS and Android
- Low latency
- Support HDMI output with embedded audio

## Application Diagram

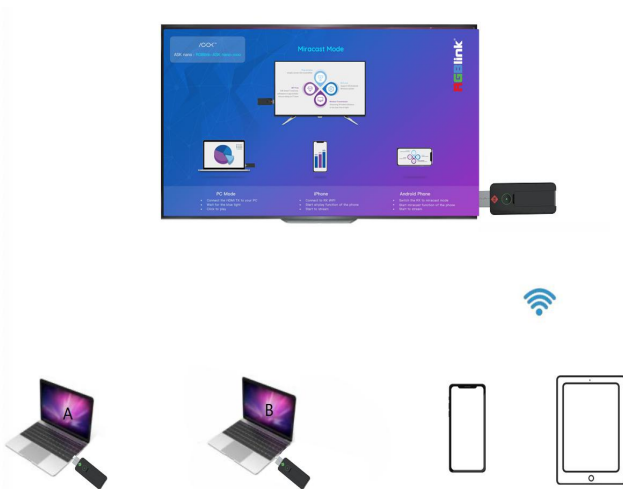

## Dimensions

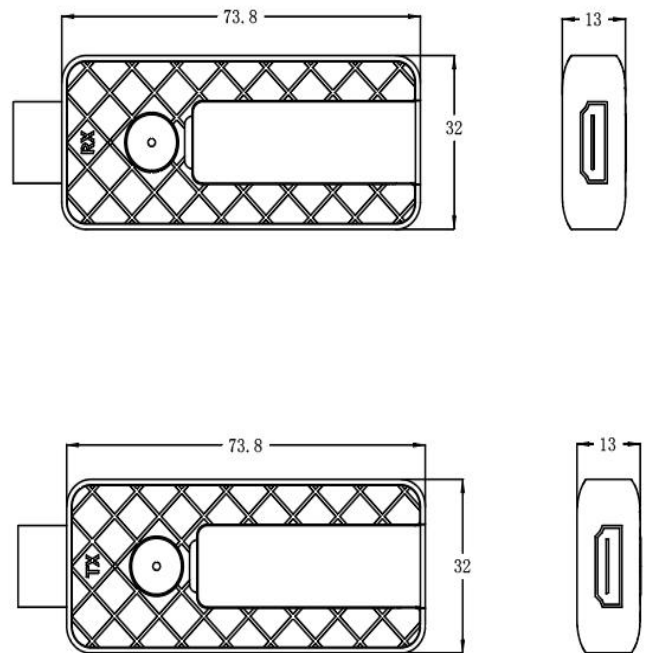

## Order Codes

Product Code	Item
450-0101-02-0	ASK nano TX
450-0002-02-0	ASK nano RX
450-1002-01-0	ASK nano Starter Set (TX*1+RX*1)
450-1004-01-0	ASK nano Meet Set (TX*2+RX*1)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com  
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice

**RGBlink**<sup>®</sup>  
www.rgbink.com



## Specification

### Receiver

<b>Connectors</b>	Output	HDMI	1×HDMI-A	
	Power	USB	1×microUSB	
<b>Performance</b>	Output Resolutions	HDMI		
		VESA	1920×1080@60	
	Supported Standards	HDMI	1.3	
<b>Power</b>	Input Voltage	DC 5V/500mA		
	Max Power	2.5W		
<b>Environment</b>	Temperature	-0°C ~ 70°C		
	Humidity	10%~85%		
<b>Physical</b>	Weight	Net	0.03kg	
		Packaged	0.34kg	
	Dimension	Net	85mm×30mm ×13mm	
		Packaged	170mm×120mm×50mm	

### Transmitter

<b>Connectors</b>	Input	HDMI	1×HDMI-A	
	Power	USB	1×microUSB	
<b>Performance</b>	Output Resolutions	HDMI		
		VESA	800×600@60   1024×768@60   1280×720@60   1280×800@60   1280×960@60   1280×1024@60   1400×1050@60   1600×1200@60   1920×1080@60	
	Supported Standards	HDMI	1.3	
<b>Power</b>	Input Voltage	DC 5V/500mA		
	Max Power	2.5W		
<b>Environment</b>	Temperature	-0°C ~ 70°C		
	Humidity	10%~85%		
<b>Physical</b>	Weight	Net	0.03kg	
		Packaged	0.34kg	
	Dimension	Net	85mm×30mm ×13mm	
		Packaged	170mm×120mm×50mm	

